

FIG. 1

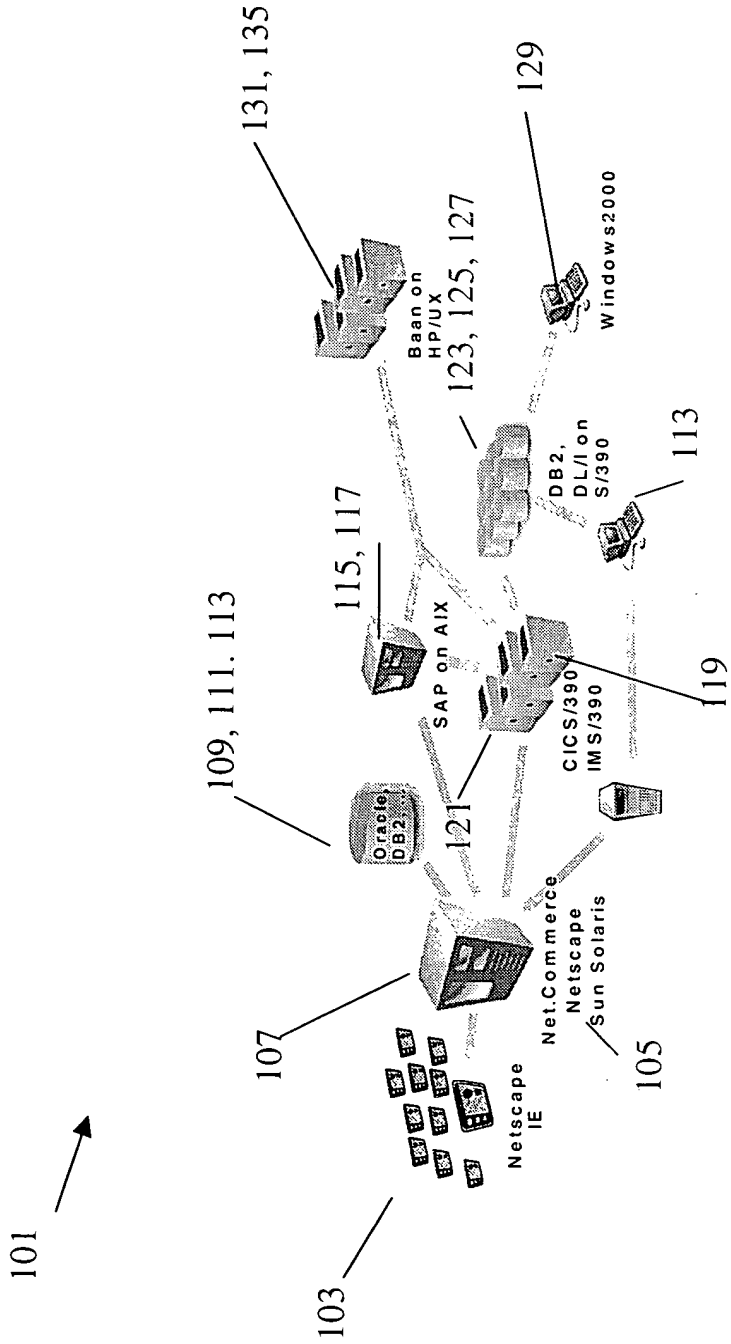


Figure 1

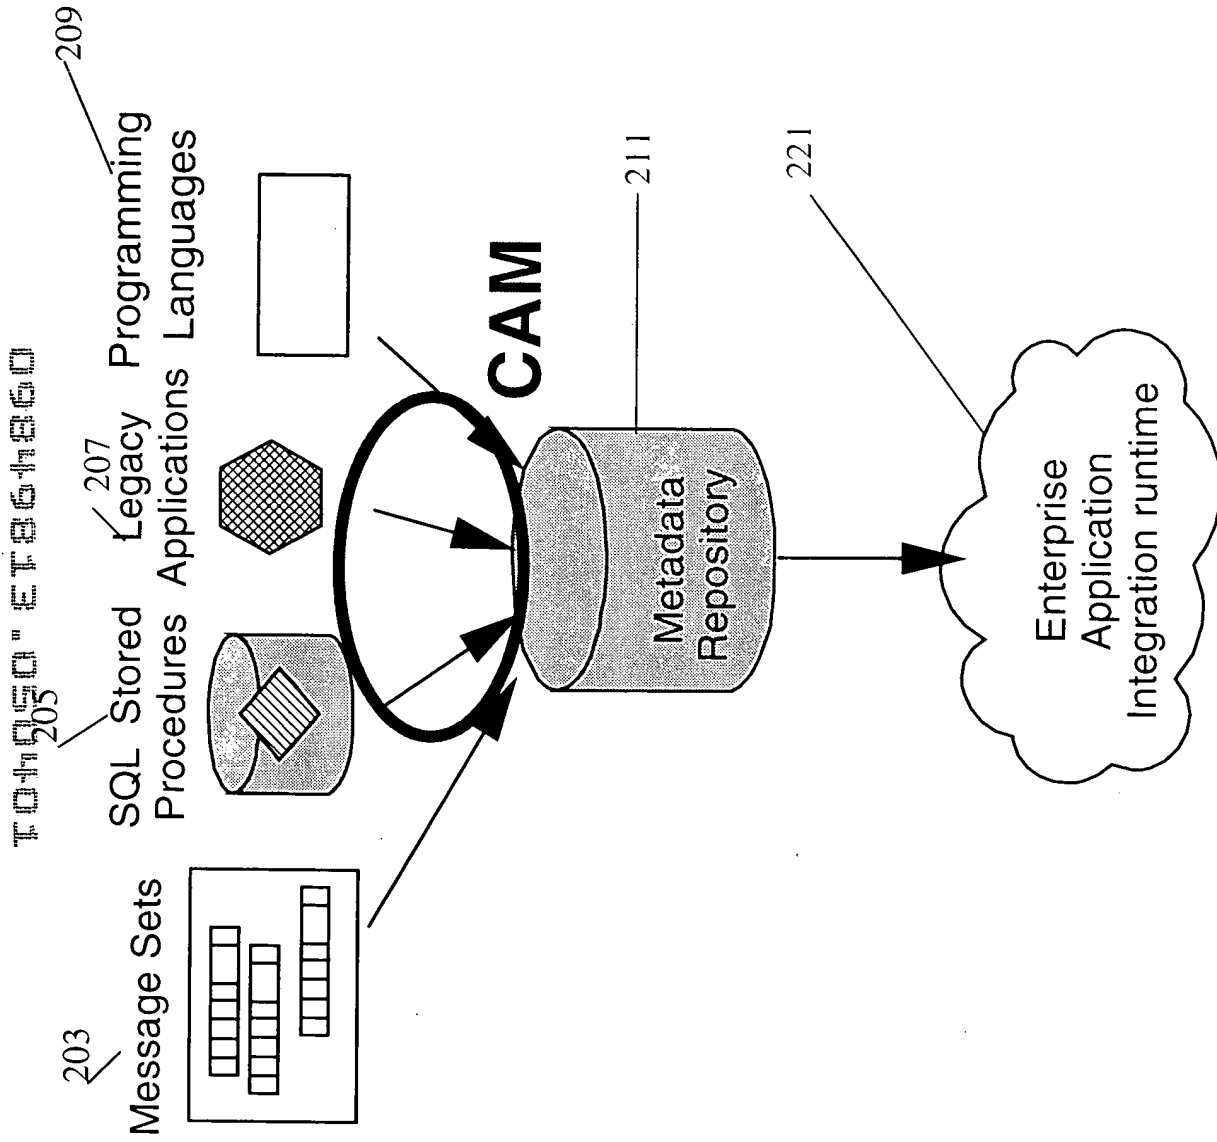


Figure 2

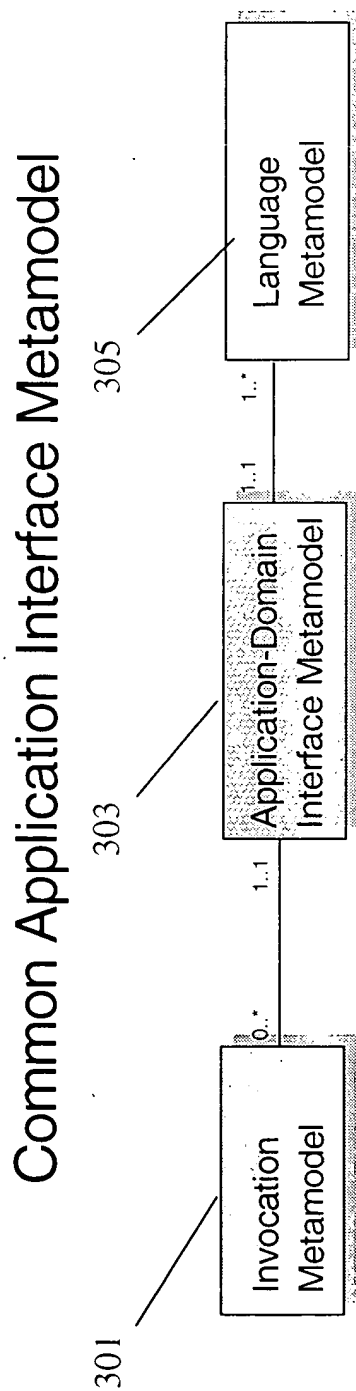


Figure 3

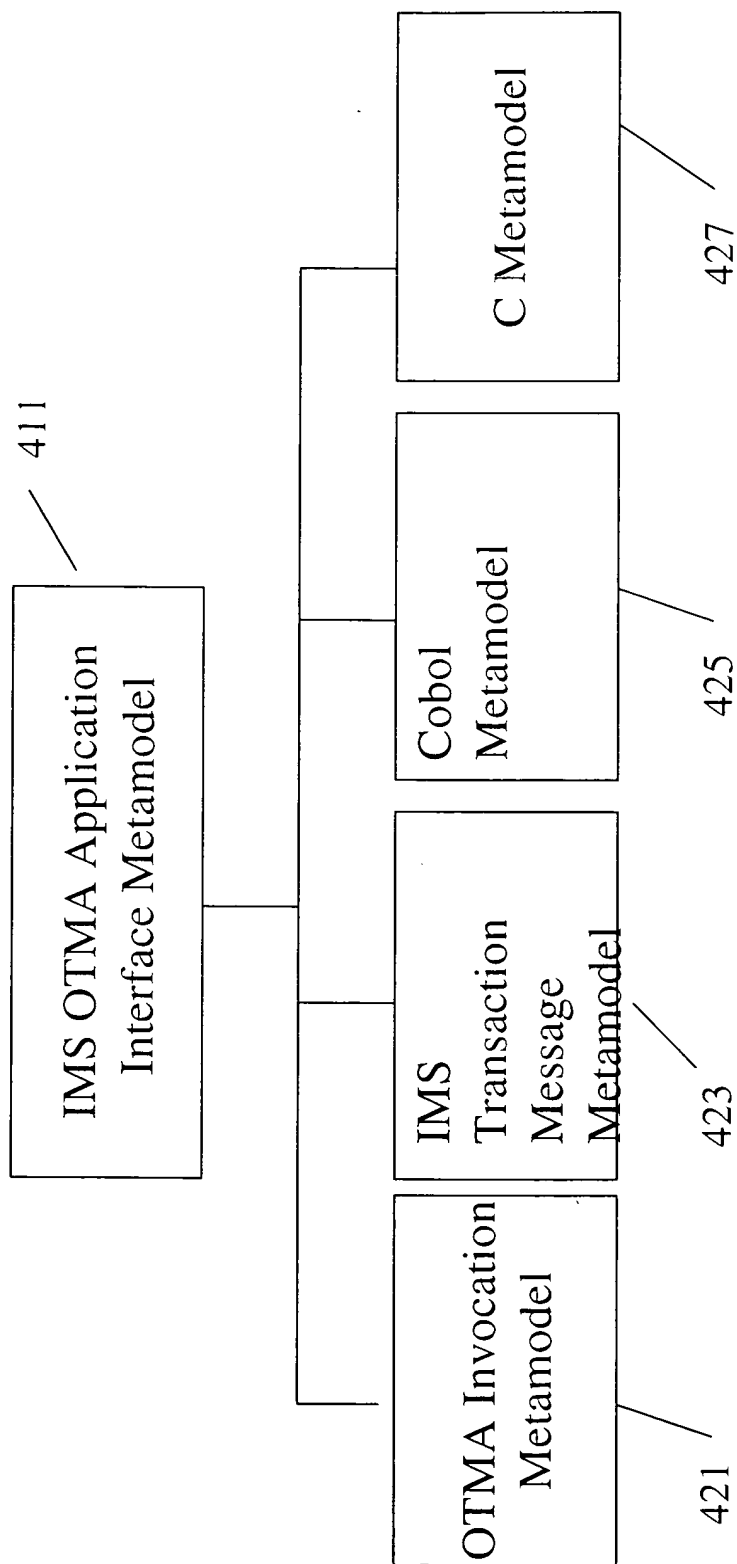


Figure 4

FIG. 5

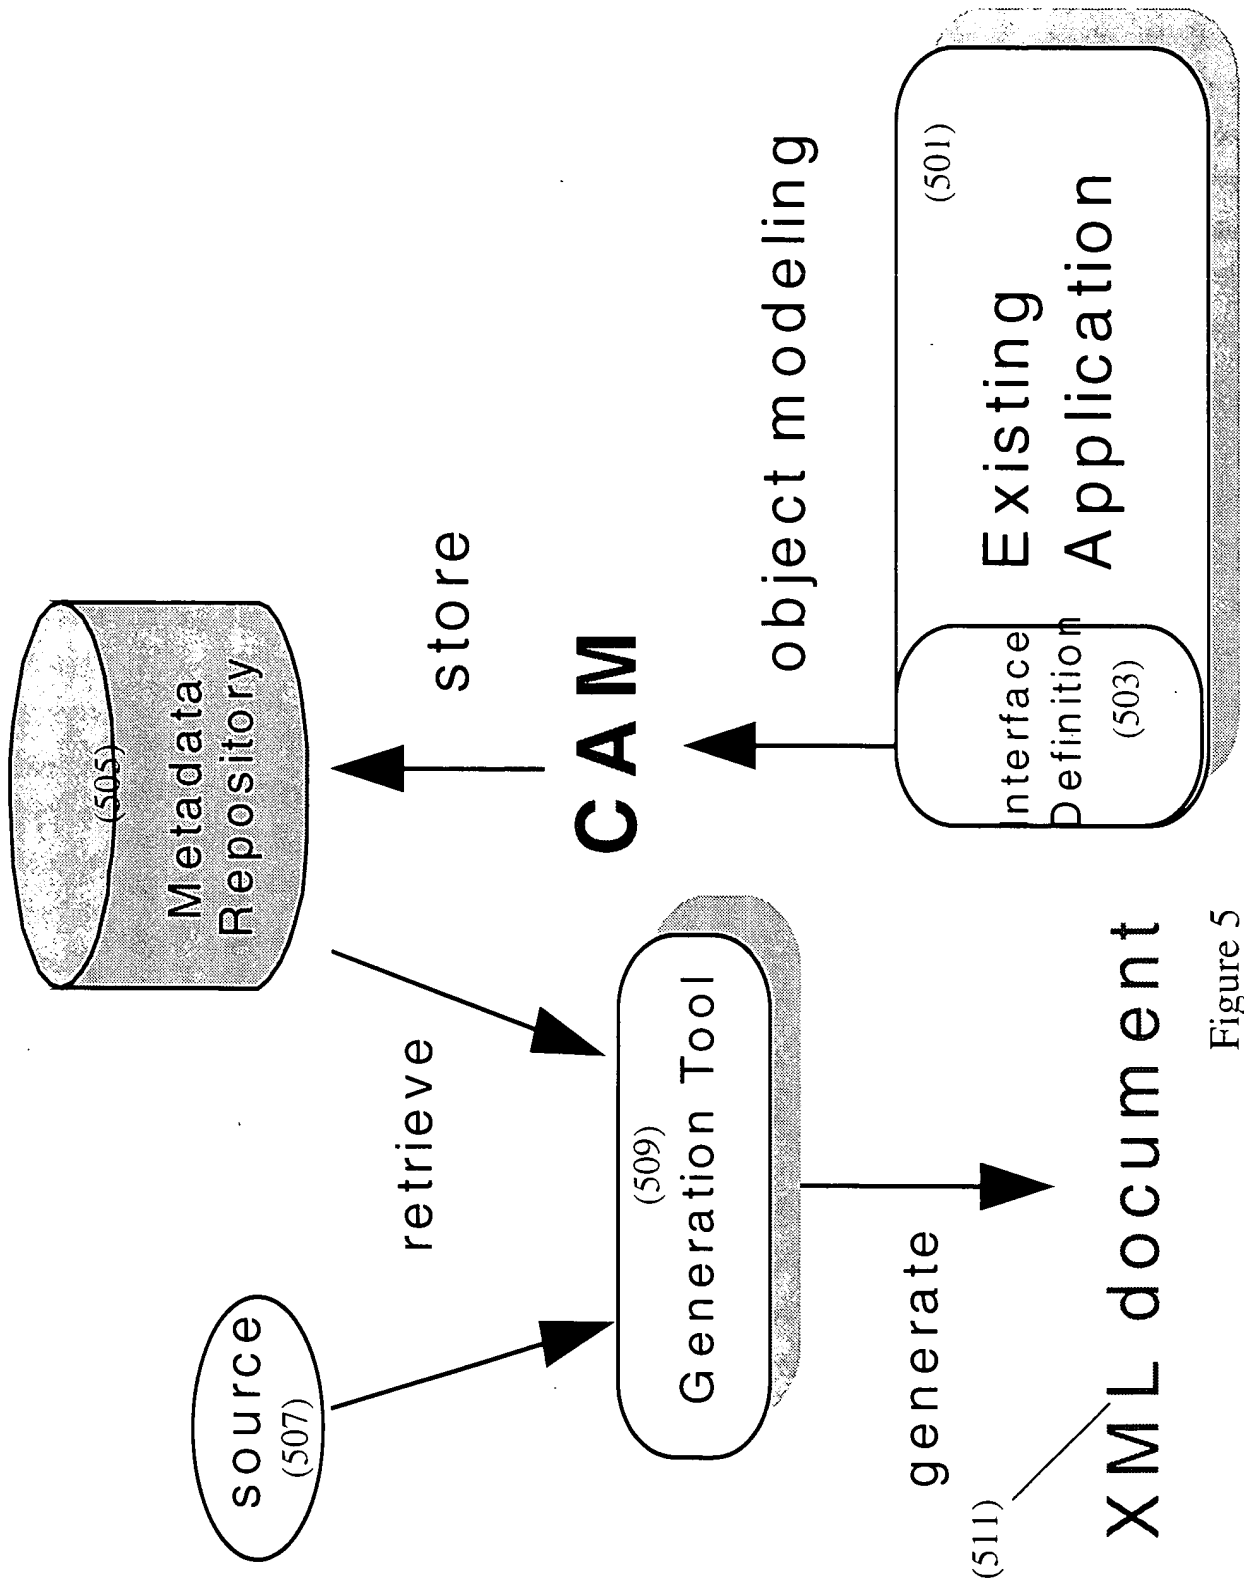


Figure 5

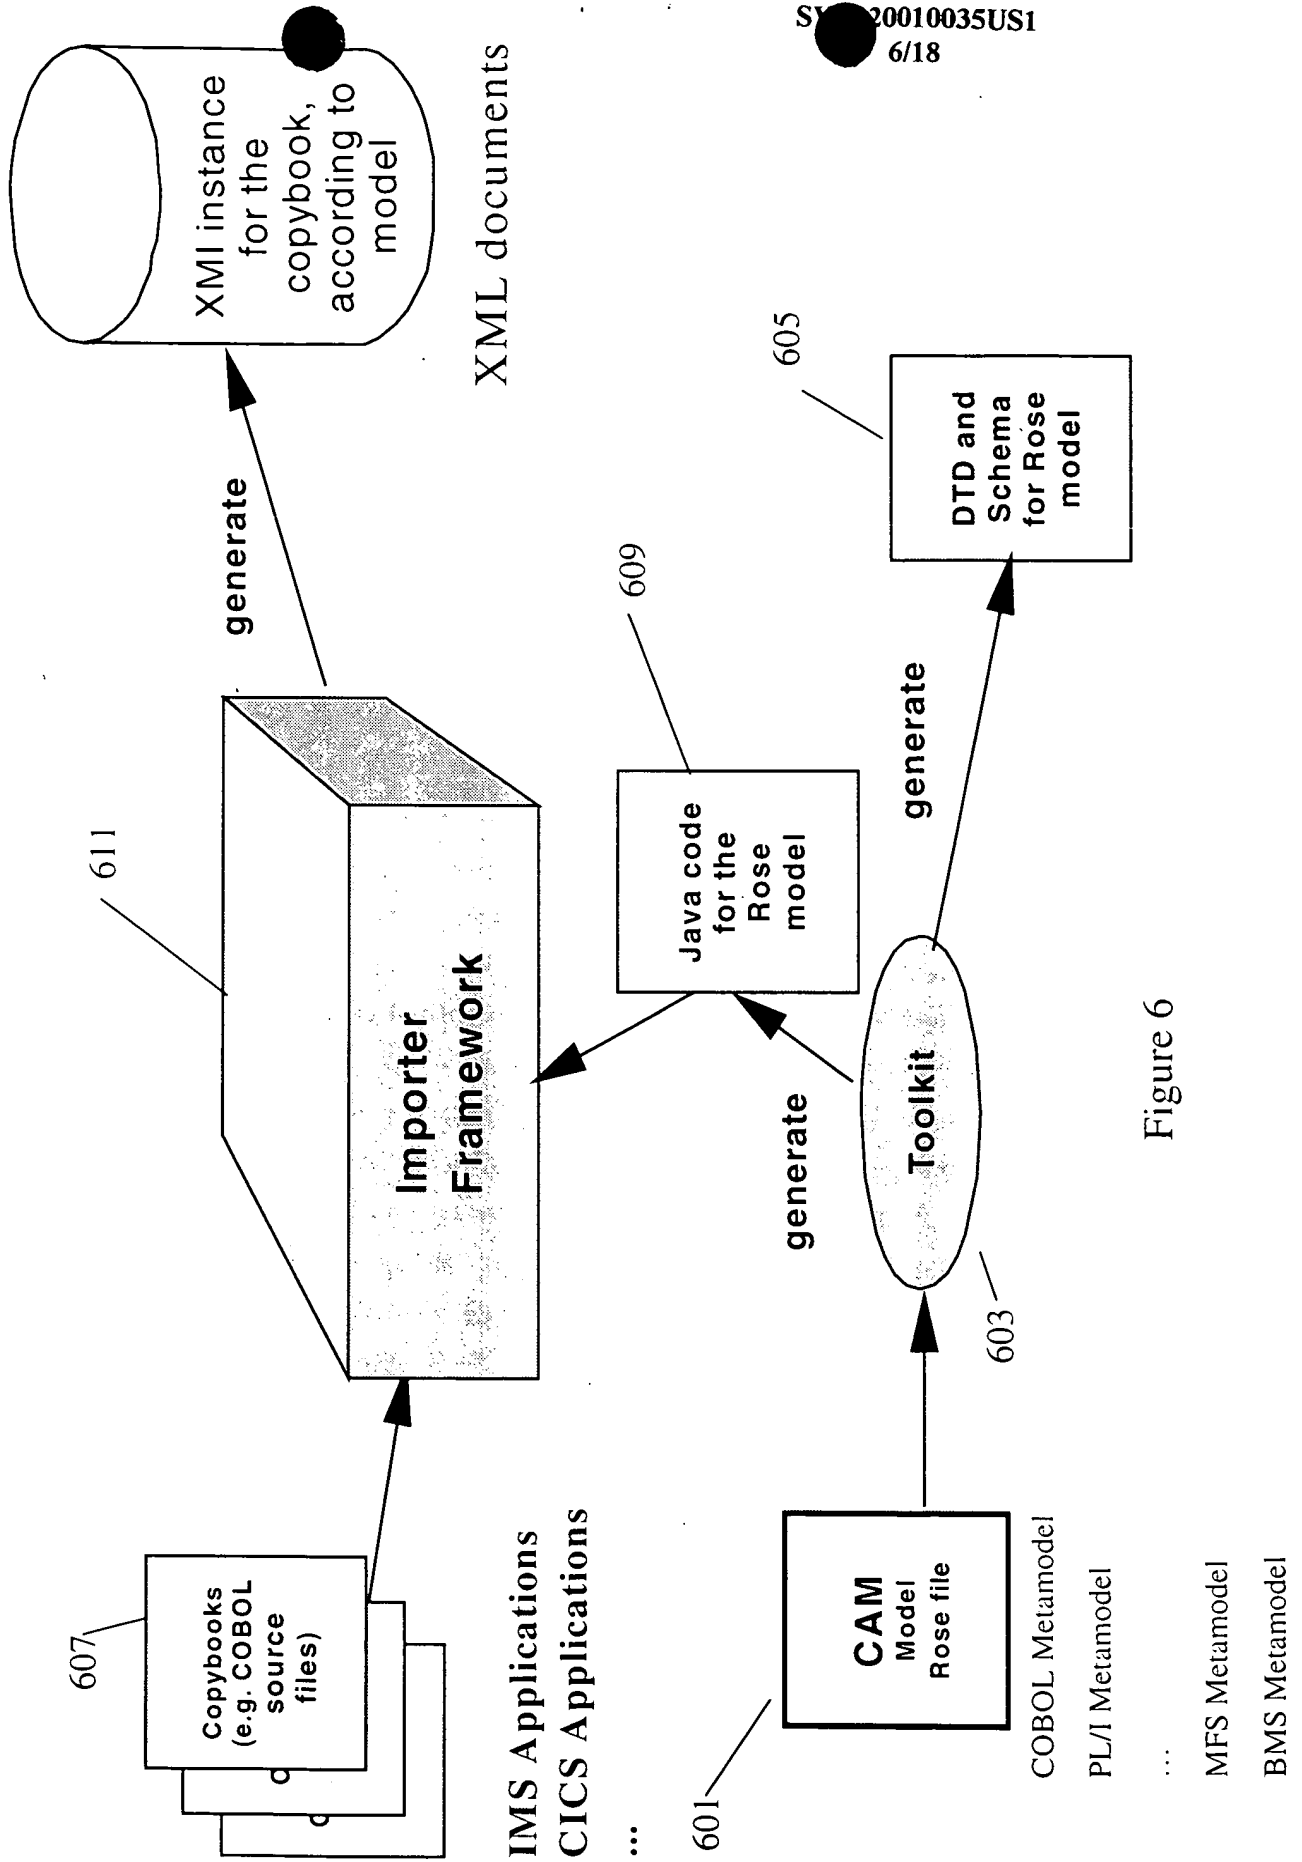


Figure 6

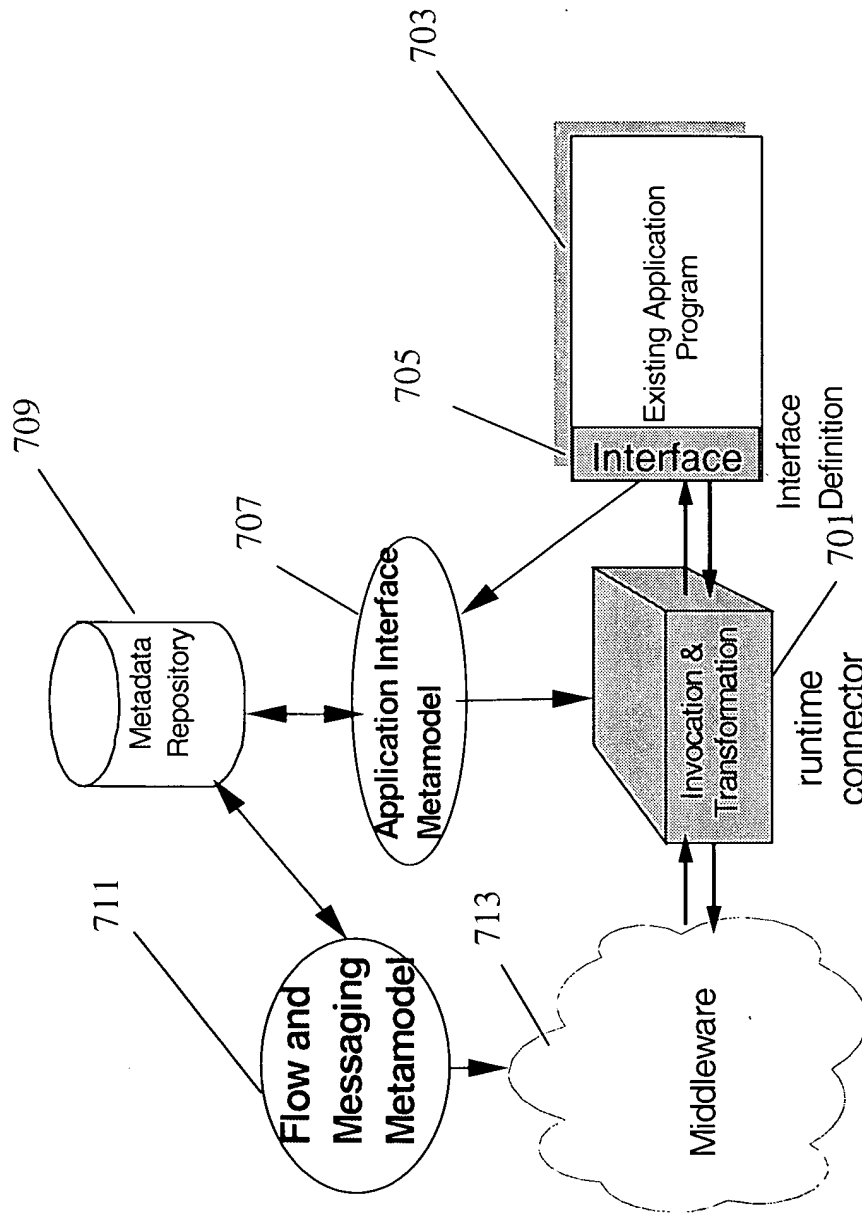


Figure 7

FIG. 7

FIG. 8

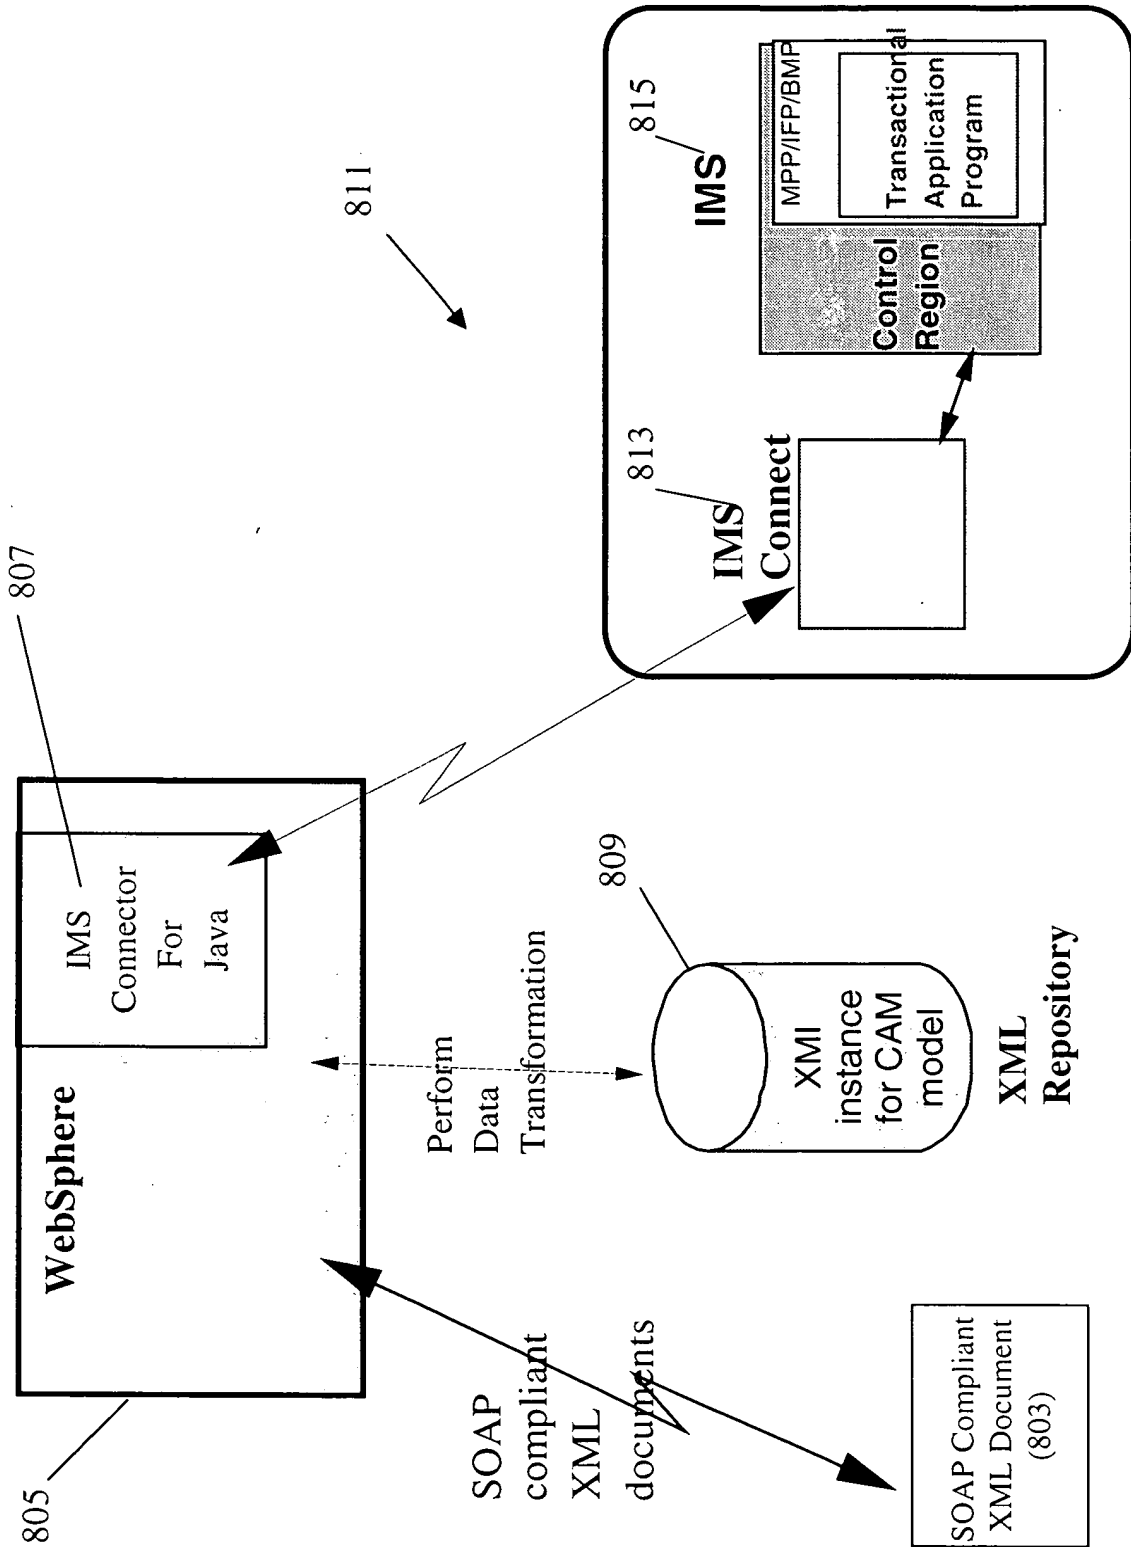


Figure 8

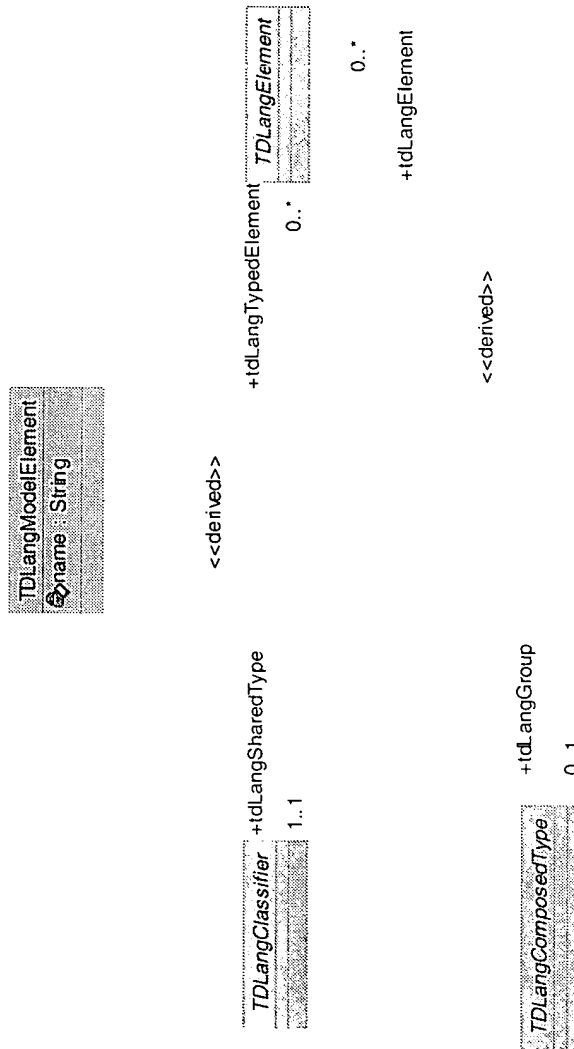


Figure 9



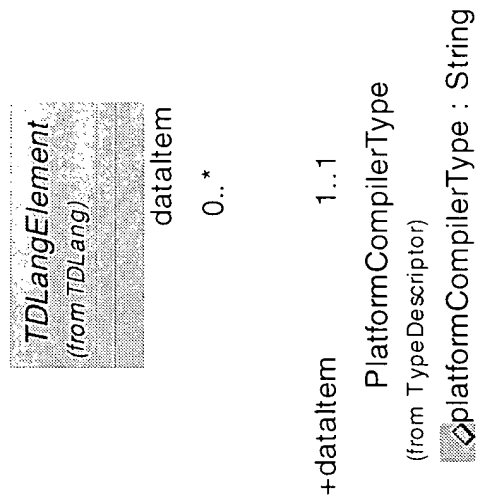


Figure 11

704050"ET864850

<<enumeration>>	
sigCoding	lengthEncoding
onesComplement	fixedLength
signMagnitude	lengthFixed
zonedSigns	unterminated
packedSigns	
signedBinary	
signedDecimal	
<<enumeration>>	
addInt	
bit	
byte	
word	
doubleWord	
<<enumeration>>	
floatType	
unpacked	
IEEEExtended	
IEEEExtendedAX	
IEEEExtendedAS30	
IEEEExtendedAS40	
IEEEExtended	
BM30Hex	
BM40Hex	
<<enumeration>>	
accessor	
ReadOnly	
WriteOnly	
ReadWrite	
noAccess	
<<enumeration>>	
packedDecimalSign	
ANS	
ANSolution	
QNT CS2 AX	
<<enumeration>>	
bitModel	
model16	
model31	
model64	
model128	

Figure 12

TD4050"ET864B60

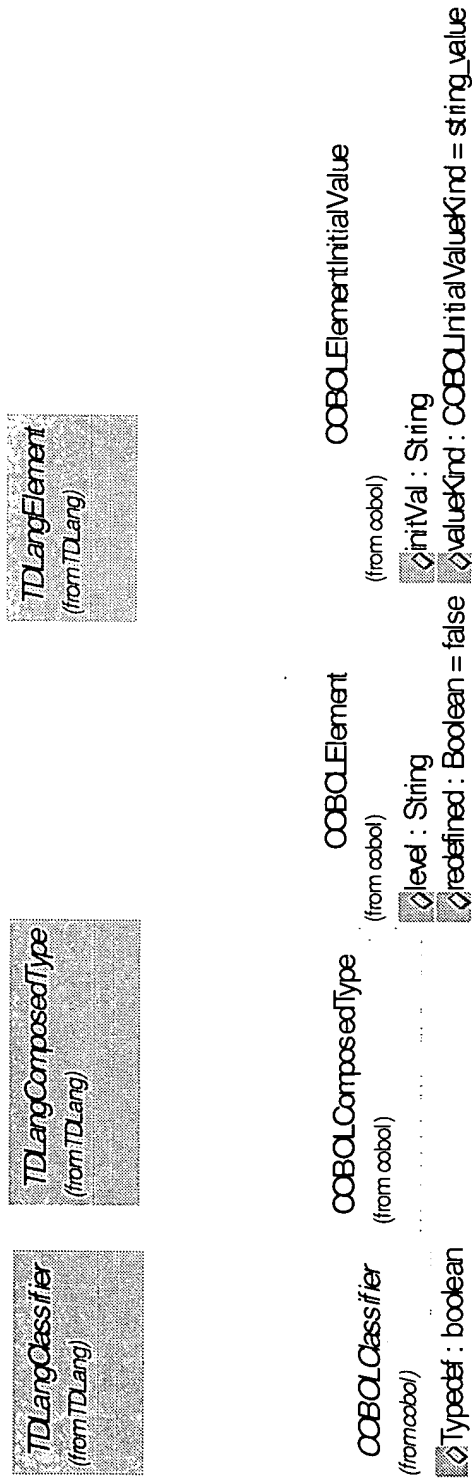


Figure 14

FIG. 15

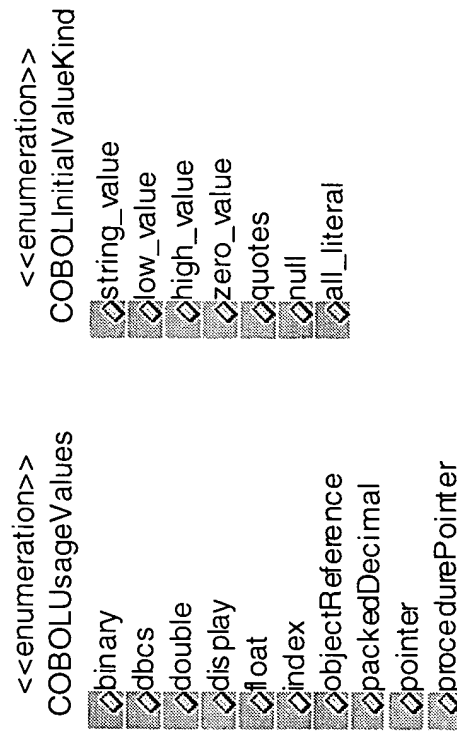


Figure 15

FIG. 16

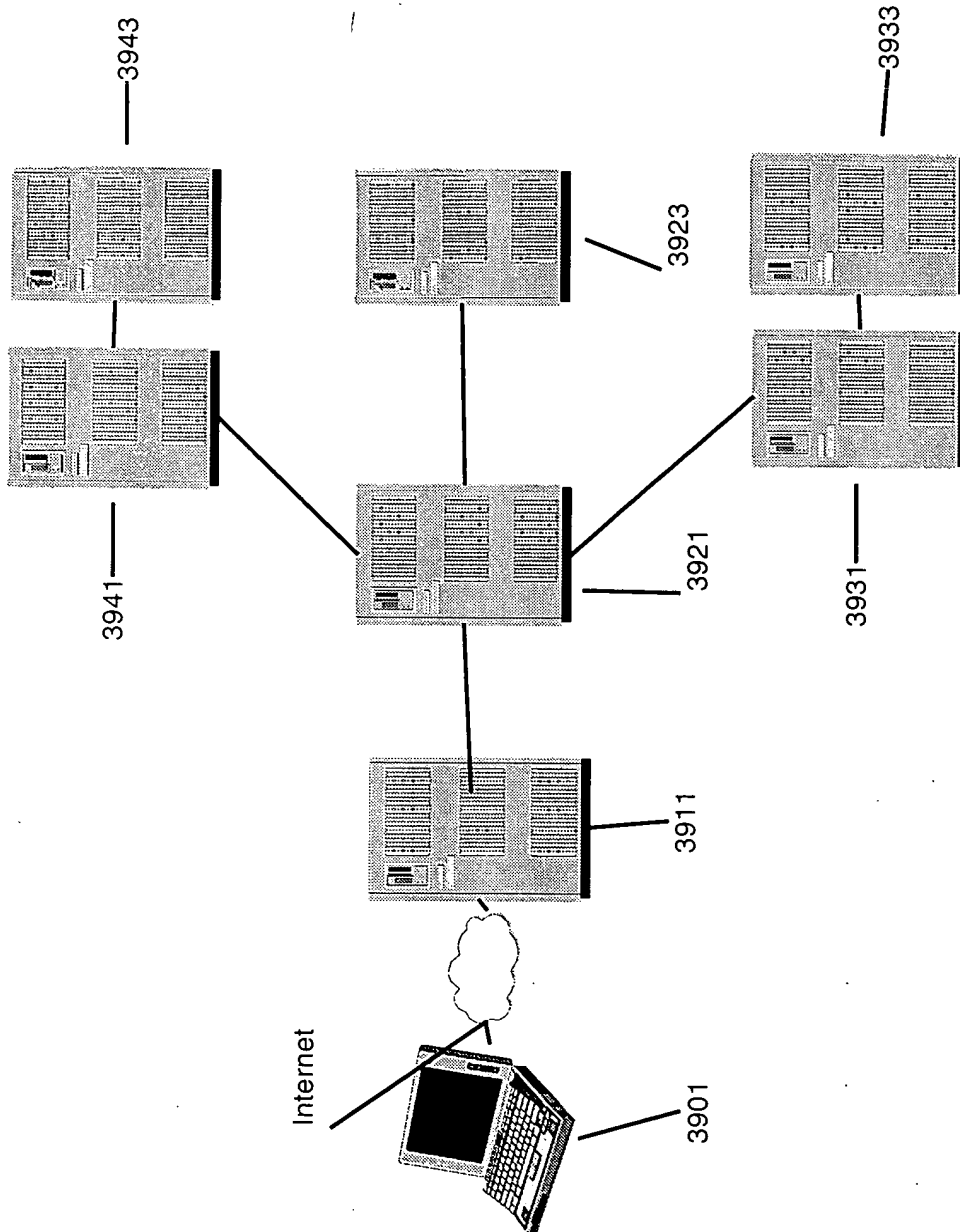


FIGURE 16

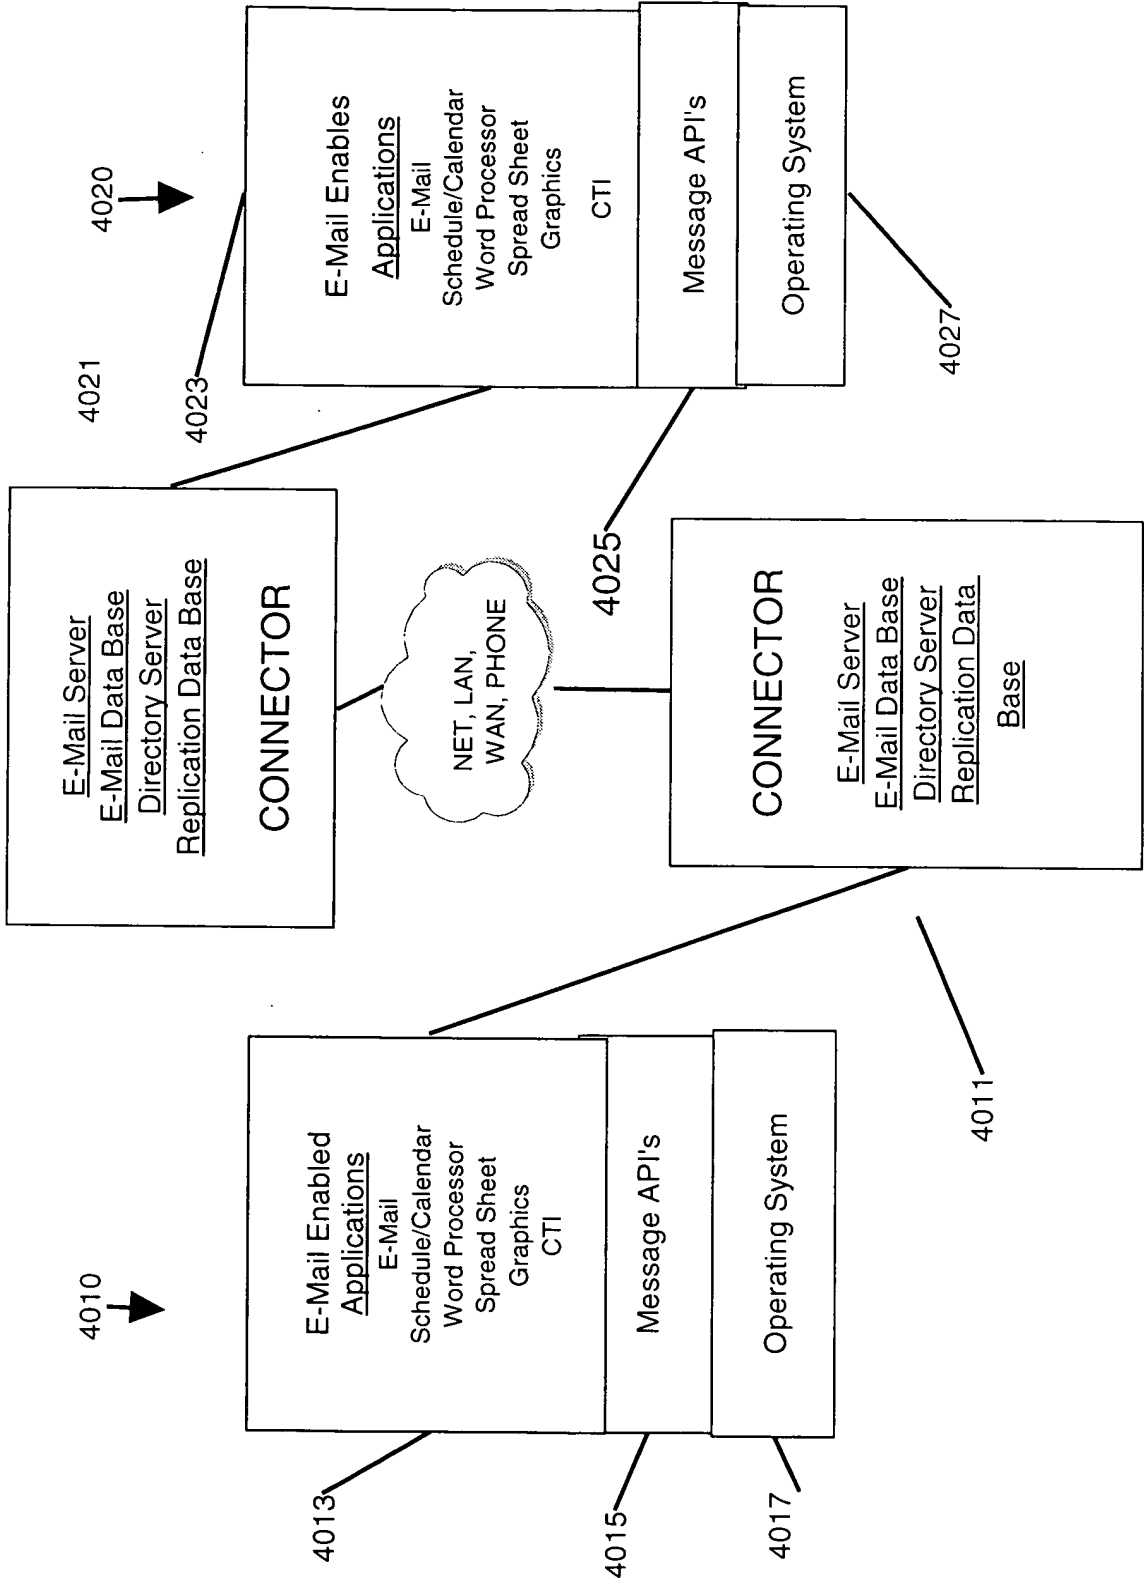


FIGURE 17

FIG. 18

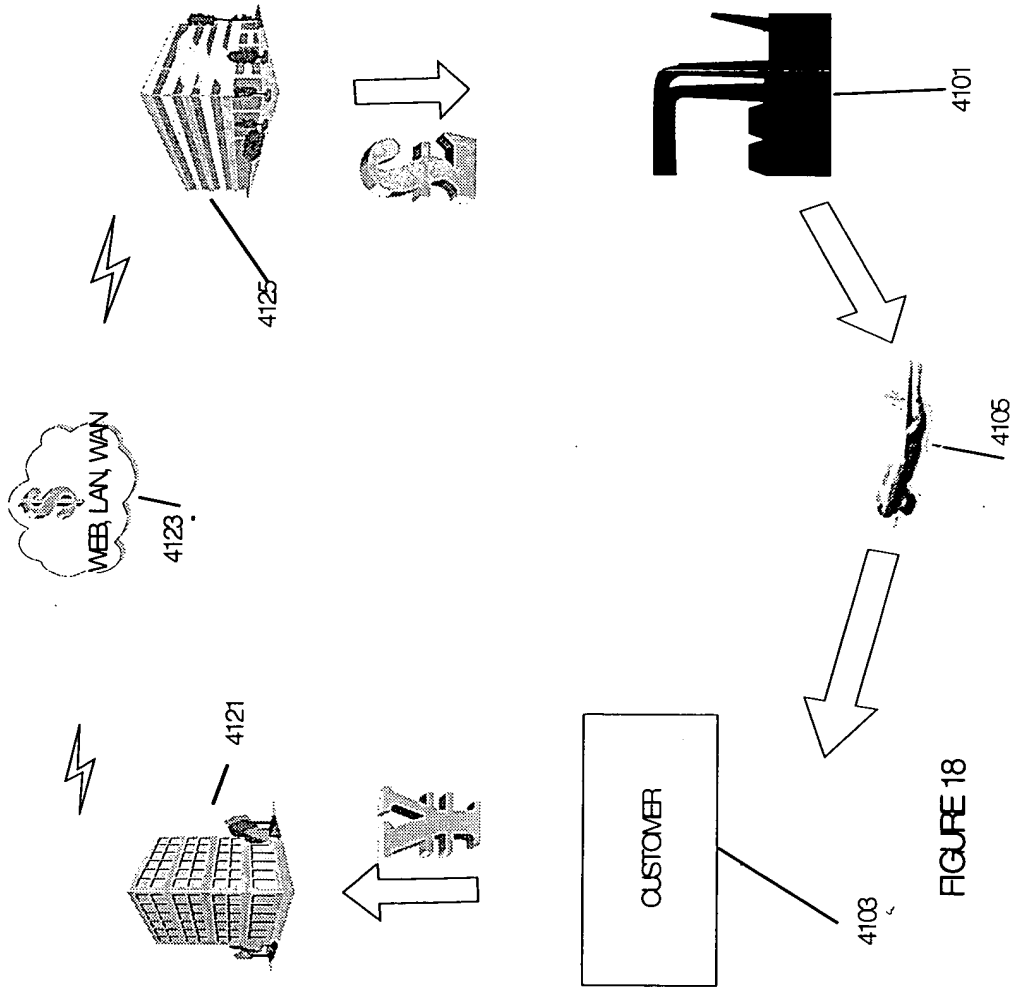


FIGURE 18